


GatorSTRAP® BUCKLE THREADING INSTRUCTIONS

1. Begin by positioning the buckle prongs on top with open ends facing to the left.
2. Form a loop on one end of the strap and insert it through the center of the buckle. Loop the strap over the top prong and continue in between the two prongs, leaving a tail of approximately 3 inches.
3. Repeat step 2 on the other side of the buckle, leaving a tail of approximately 20 inches. NOTE: to fully utilize the strength of the buckle, always tension with the open ends of the buckle prongs facing to the left.
4. Pull both strap ends manually to relieve slack and then apply tensioning tool to the long tail and tension as desired.
5. Cut long end of strap to desired length.



CAROLINA STRAPPING
AND BUCKLES COMPANY

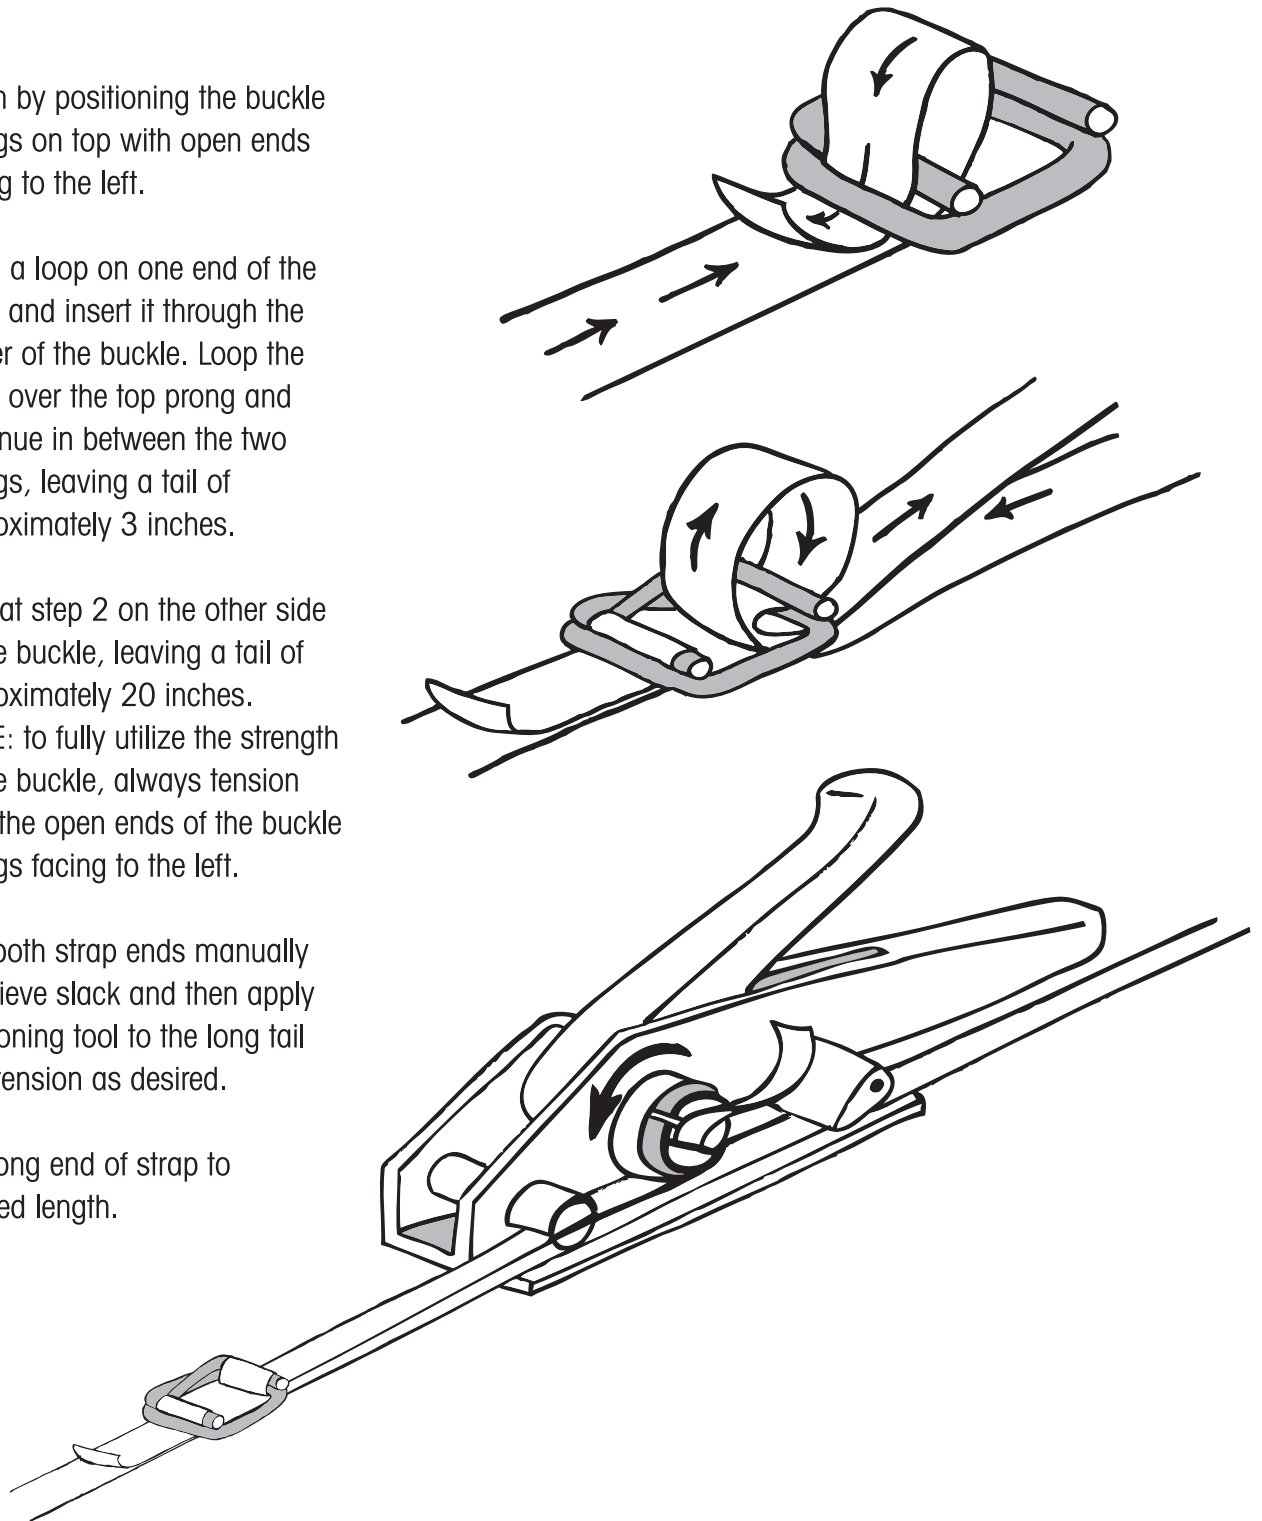

2740 West Franklin Boulevard | Gastonia, NC 28052 | Ph. 704.349.0000 | Fax 704.349.0010

www.CarolinaStrapping.com